


NeoPro10i Ribbon Tweeter


Feature

- Fountek's 4-th generation ribbon driver technology
- 14mm width enforced sandwich ribbon diaphragm
- Higher power handling, lower distortion, very fast transition
- Strong Neodymium magnet
- Built-in impedance convertor
- Desinged for HIGH END audio

SPL vs Freq

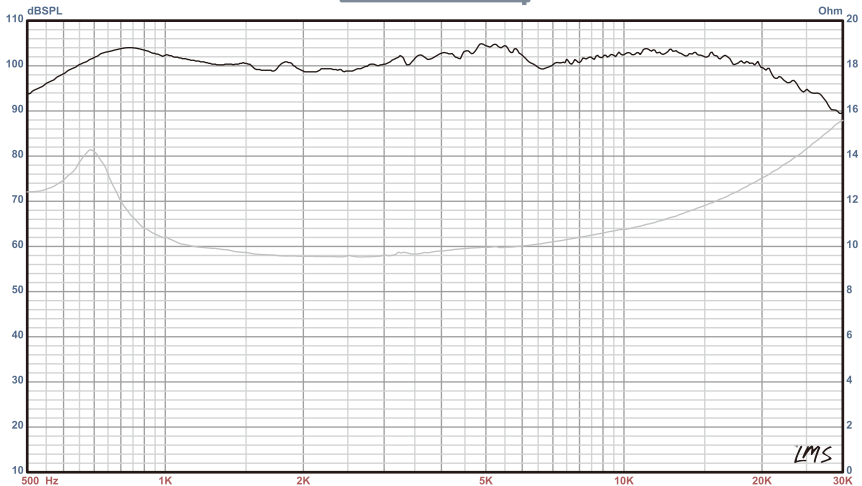

on-axis frequency response

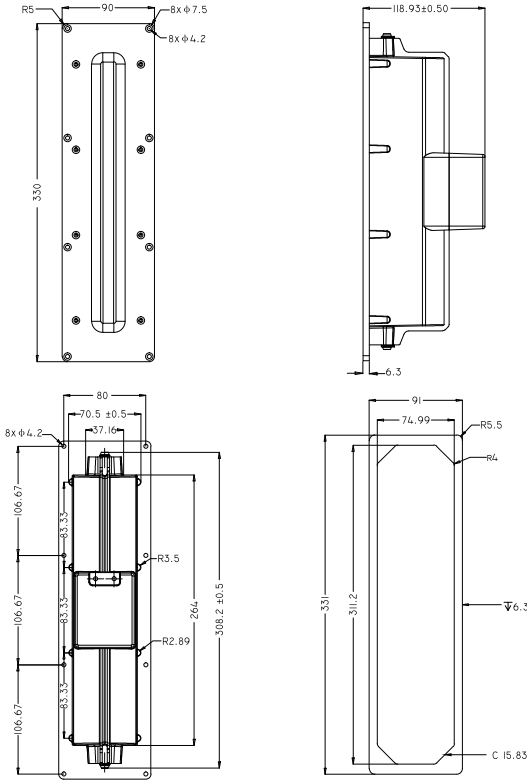

Mechanical drawing

Recommend Cutout

Parameter	
Sensitivity	102db/1M/2.83V
Power handling	80Wnominal, 160W max
Frequency range	700-40,000Hz
Nominal impedance	9 ohm
DCR	0.02 ohm
Ribbon dimension	14mmX255mmX0.015mm
Effective ribbon area	3570 square millimeter
Ribbon weight	14 milligram
Gap flux	0.5 Telsa average
Gap height	15 millimeter
Recommend crossover frequency	1,000Hz with -18dB
Net.weight	5,050 gram

Address: No.112 Luli Street, Jiaxing, Zhejiang 314001, China
 Tel: +86-573-8301 9220 Fax: +86-573-8301 9221
 Website: www.fountek.net Email: info@fountek.net